


AP65 LABEL APPLICATOR

SPARKS OF NEW TECHNOLOGY MECHA-SENSOR WITH STRIKING NOVELTY

THE LABELLING STROKE IS UP TO 60mm.

No other conventional type label applicators assures proper and exact labelling like the AP65 series of TOWA LABEL APPLICATOR.

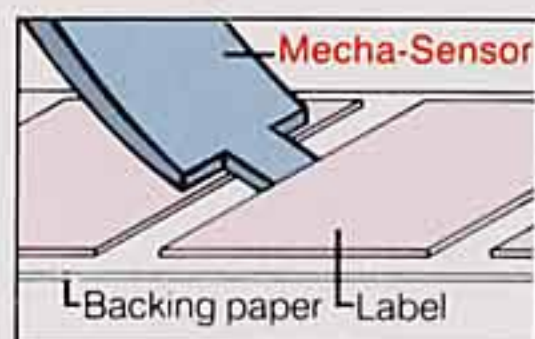

The Mecha-Sensor adjusts label strokes automatically.



AP65-30



AP65-60



AP65-100

HOW TO USE

1

Open Label Holder, place label roll, push down Bottom Lever to open.



2

Insert label sideways under transparent Label Pressor, turn it back onto Bottom Cover, then close Label Holder.



3

Close Bottom Cover, lock it firmly with Bottom Lever.



4

Cut backing paper, pulling it downwards carefully as arrow indicates.



5

Pull machine toward you at the same speed with gripping motion.



NOTICE

1. Unnecessary to make slit or slot on backing paper for feeding.
2. Film with less than 50 μ m thickness is unacceptable.
3. Use only die-cut labels.
4. A cotton-swab moistened with ALCOHOL, is recommended to wipe adhesive from Mecha-Sensor.

SPECIFICATIONS

MODEL	LABEL SIZE (mm)		MAX. OUTSIDE DIAMETER (mm)
	STROKE	WIDTH	
AP65-30	20-60	20-30	100
AP65-60	20-60	25-60	100
AP65-100	20-60	55-100	100

Please contact us if your shape labels seem difficult to dispense.

*We reserve the right to change specifications without notice for improvement.